


**广州尼博星电子科技有限公司**  
**Guangzhou Nyboxing Electronic Technology Co., Ltd**

物料编码 Material encoding	型号 Model	CMI UU9.8-30mH
---------------------------	-------------	----------------


**NO1. 物料清单 Bill Of Material**

No.	物料名称 Name of material	规格型号 Specifications and models	制造商 Manufacturer	认证号 Certification number
1	BOBBIN	UU9.8	CHANGCHUN PLASTICS CO.,LTD	E59481
2	CORE	UU9.8	HAINING ZHONGXIN ELECTRONIC CO.,LTD.	/
3	WIRE	UEW MW79 155°C	ZHEJIANG HONGBO ELECTRIC WIRE Co., LTD	E221719
4	TAPE	PZ POLYESTER	JINGJIANG JINGYANG INSULATING PRODUCT CO., LTD.	E165111
5	VARNISH	T-4260	WUJIANG TAIHU INSULATION MATERIAL CO., Ltd.	E228349


**NO2.骨架尺寸图 Frame size chart**

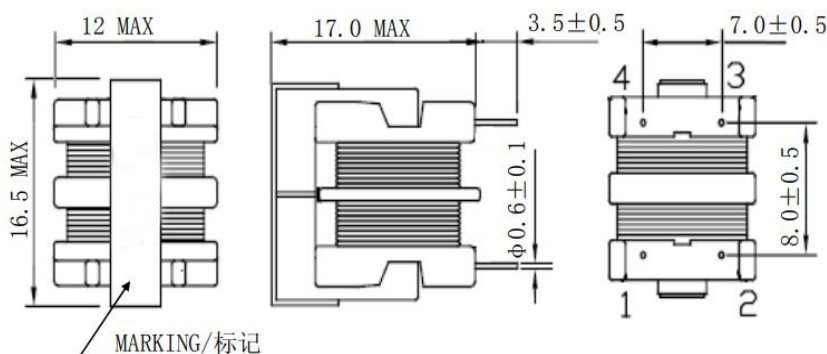

**NO3.原理图 Schematic**

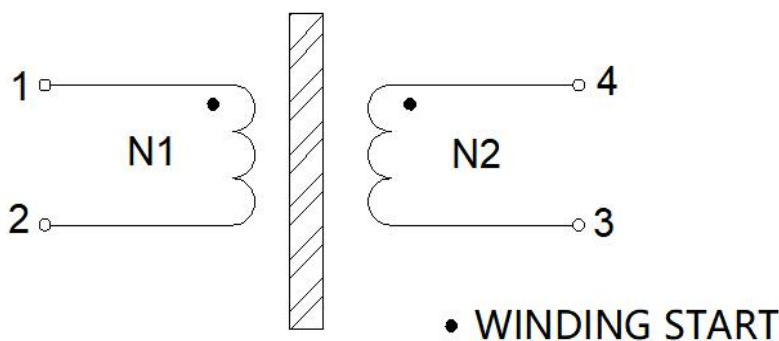

### NO3.绕线结构图 Winding structure

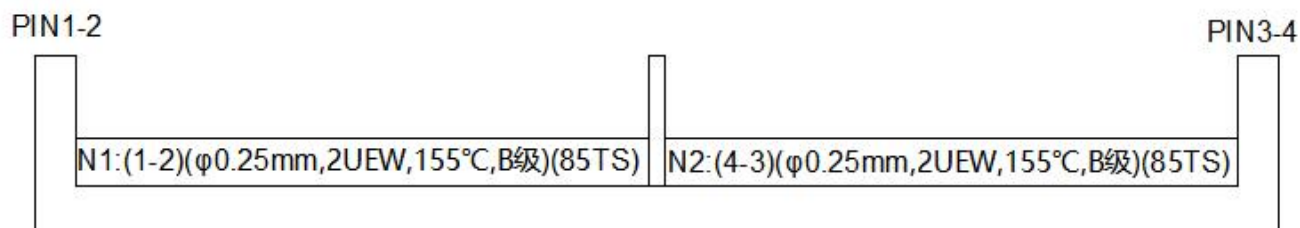

绕组 WDG	进线脚位 BEGINNING	进线套管 TEFLON TUBE	线材规格 WIRESIZE	匝数 TURNS	出线脚位 TERMINAL	出线套管 TEFLON TUBE	绝缘胶纸 层数 TAPE TURNS	备注 Remarks
N1	1脚	/	$\phi 0.25\text{mm}$ , 2UEW, 155°C, B级	85TS	2脚	/	/	均匀绕
N2	4脚	/	$\phi 0.25\text{mm}$ , 2UEW, 155°C, B级	85TS	3脚	/	/	均匀绕

### NO4.工艺要要求 Process requirements

- ①各绕组的绕制方向均一致;
- ②产品需真空含浸;

### NO5.电气性能Electric property

- ①电感量L1 (1-2)  $\geq 30\text{mH}$ ; 电感量L2 (4-3) $\geq 30\text{mH}$ ; 测试条件@1KHz/0.25V/25°C;
- ②电感偏差 $|L1-L2| \leq 0.5\text{mH}$ ;
- ③线-线耐压1500VAC/5mA/30s通过;
- ④线-磁芯耐压1000VAC/5mA/30s通过;