
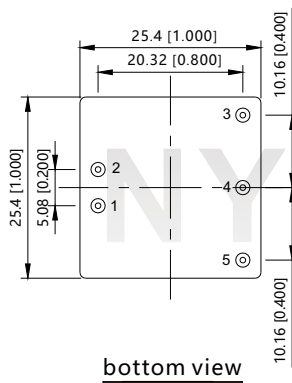


10W DC/DC Module power supply
product property


- ★ International standard pin mode
- ★ Output short-circuit protection, self-recovery
- ★ Isolation of a withstand pressure of 1500VDC
- ★ High efficiency, high power density, and low ripple noise
- ★ Industrial-grade product design, with a small volume
- ★ operating temperature range : -40~+85°C

V(U)RBxxYMD-10R3series-----It is a 4:1 wide voltage input range, efficiency up to 88%, 1500VDC isolation voltage stable power module, the product is widely used in medical, industrial control, power, instrumentation, communication occasions and so on

Figure of encapsulation size


PIN	Feet function
1	-Vi
2	+Vi
3	+Vo
4	NP
5	-Vo

stakes:
 Size unit : mm[inch]
 dimensional tolerance: $\pm 0.5[\pm 0.020]$
 NP: The pin is empty foot

product types choosing

model	Input voltage range (VDC)	Output Voltage (VDC)	Output current (m)	productiveness (Typ)
VRB1203YMD-10WR3	9~18V (Nominal: 12VDC)	3.3V	2000mA	78%
VRB1205YMD10WR3		5V	2000mA	78%
VRB1212YMD-10WR3		12V	830mA	79%
VRB1215YMD-10WR3		15V	670mA	80%
VRB1224YMD-10WR3		24V	420mA	82%
VRB2403YMD-10WR3	18~36V (Nominal: 24VDC)	3.3V	2000mA	78%
VRB2405YMD-10WR3		5V	2000mA	78%
VRB2412YMD-10WR3		12V	830mA	79%
VRB2415YMD-10WR3		15V	670mA	80%
VRB2424YMD-10WR3		24V	420mA	82%
VRB4803YMD-10WR3	36~75V (Nominal: 48VDC)	3.3V	2000mA	78%
VRB4805YMD-10WR3		5V	2000mA	78%
VRB4812YMD-10WR3		12V	830mA	79%
VRB4815YMD-10WR3		15V	670mA	80%
VRB4824YMD-10WR3		24V	420mA	82%

URB2403YMD-10WR3		3.3V	2000mA	78%
URB2405YMD-10WR3		5V	2000mA	79%
URB2412YMD-10WR3	9~36V	12V	830mA	80%
URB2415YMD-10WR3		15V	670mA	81%
URB2424YMD-10WR3		24V	420mA	83%
URB4803YMD-10WR3		3.3V	2000mA	78%
URB4805YMD-10WR3		5V	2000mA	79%
URB4812YMD-10WR3	18~75V	12V	830mA	80%
URB4815YMD-10WR3		15V	670mA	81%
URB4824YMD-10WR3		24V	420mA	83%

output characteristic

project	going	Min	Typ	M x
output power		0	--	10W
Output voltage accuracy	Input voltage range, 100% load	--	±2%	--
voltage regulation	Under rated load, input voltage voltage ± 1%	--	±0.2%	--
load regulation	10% to 100% load	--	±0.5%	--
Output ripple noise ^①	20 MHz bandwidth (peak-peak)	--	100mV	--
Temperature drift coefficient	Nominal voltage input, 100% load, -40°C ~ + 85°C	--	--	±0.03%/°C

* pour:①The test method of ripple noise adopts the parallel line test method, and please refer to the "DC-DC Module Power Supply Application Guide" for the specific operation method.

general characteristic

project	going	Min	Typ	M x
Insulation and pressure resistance	Input-output, with a test time of 60s	--	1500VDC	--
working temperature		-40°C	--	+85°C
Storage temperature		-55°C		+125°C
Store humidity		--	--	95%RH
switching frequency		--	300KHz	--
MTBF	MIL-HDBK-217F, 25°C		3500,000h	
Module shell material		Metal aluminum shell		



Product performance curve

Refer to the scheme
1 Diagram representation of the typical application circuit


Figure [1] Typical application circuit

Note (Figure 1)

a. The external capacitor at the input or output end of the product is recommended. It is not recommended to use ceramic capacitors or electrolytic capacitors. Use tantalum capacitors, otherwise there is a certain risk of failure.

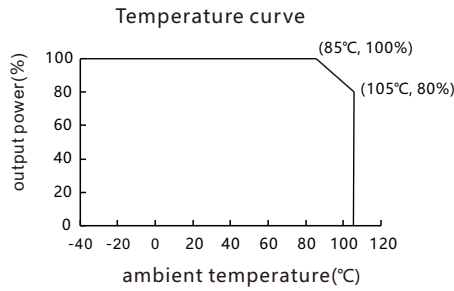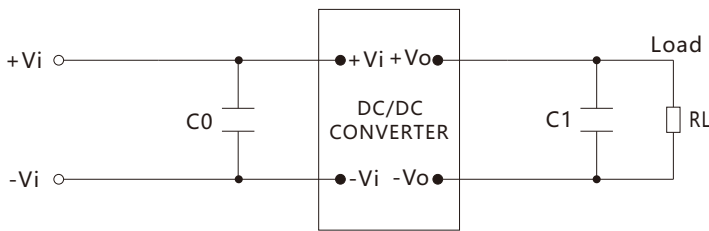b. The product does not support output parallel power or hot swap use.

input voltage	12V	24V	48V
C0	10μF	22μF	47μF

output voltage	3.3V	5V	12V	15V	24V
C1	220μF	220μF	100μF	100μF	100μF

Safety precautions and statements

- No power supply product shall exceed the rated output power, and shall not exceed the rated input voltage range;
- If the power supply product is multi-channel output, each output must be loaded at a proportional time;
- The power supply product without short circuit protection function shall not have the output terminal short circuit situation;
- If the definition of physical pin of the power supply product is inconsistent with the product selection manual, the definition of physical pin shall prevail;
- Do not transform our power supply products at will, and our company is not responsible for all the consequences caused by this;
- For more product information, please go to our official website (www.gzny-boxing.com).

