


5W AC/DC SMPS
DESCRIPTION


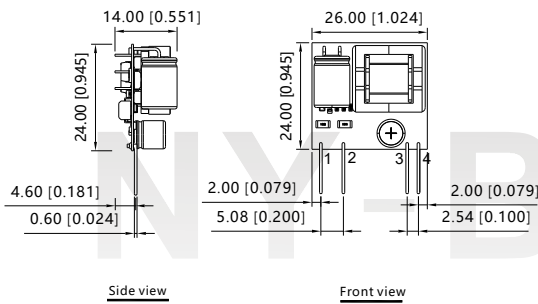
NF05-AxxHS(HIGH)




NF05-AxxLS(LOW)

- ★ Wide input : AC85~264V & DC100~375V
- ★ Output short circuit, over-current protection
- ★ Compact size, high power density
- ★ I/O isolation test voltage 3k VAC
- ★ Low ripple & noise
- ★ RoHS Compliant
- ★ Industrial grade, high reliability
- ★ Three-year quality assurance

NF05-AxxH(L)S series is one of Nyboxing's highly efficient green power AC-DC Converter series. They feature ultra-wide wide input range accepting either AC or DC voltage, high efficiency, low power consumption and Class II reinforced insulation.

Dimensions


NF05-AxxHS(HIGH)

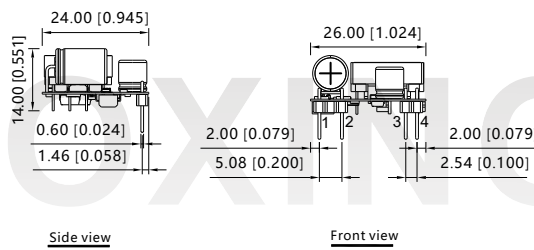

NF05-AxxLS(LOW)

| PIN | Function | |
|-----|----------|-------|
| | AC IN | DC IN |
| 1 | N | DC |
| 2 | L | DC |
| 3 | -Vo | -Vo |
| 4 | +Vo | +Vo |

Note:
 Unit: mm[inch]
 Vertical pin length 8.00[0.118]
 Horizontal pin length 6.00[0.236]
 General tolerances: ±0.20[±0.008]
 dimensional tolerance: ±0.50[±0.020]

Selection Guide

| Part No. | Output Power | Nominal Output Voltage and Current | Efficiency at 230VAC (%) Typ. | Capacitive Load (μF) Max. | Dimensions (L×W×H) |
|------------|--------------|------------------------------------|-------------------------------|---------------------------|-------------------------|
| NF05-A03HS | 5W | 3.3V/1200mA | 68% | 470μF | 26.0x14.0x24.0mm (HIGH) |
| NF05-A05HS | | 5V/1000mA | 72% | 330μF | |
| NF05-A12HS | | 12V/420mA | 74% | 220μF | |
| NF05-A15HS | | 15V/330mA | 75% | 220μF | |
| NF05-A24HS | | 24V/210mA | 77% | 100μF | |
| NF05-A03LS | 5W | 3.3V/1200mA | 68% | 470μF | 26.0x24.0x14.0mm (LOW) |
| NF05-A05LS | | 5V/1000mA | 72% | 330μF | |
| NF05-A12LS | | 12V/420mA | 74% | 220μF | |
| NF05-A15LS | | 15V/330mA | 75% | 220μF | |
| NF05-A24LS | | 24V/210mA | 77% | 100μF | |

Input Specifications

| Item | Operating Conditions | Min | Typ | Max |
|---------------------|----------------------|--------|-----|--------|
| Input Voltage Range | AC input | 85VAC | -- | 264VAC |
| | DC input | 100VDC | -- | 375VDC |

| | | | | |
|----------------------------|--------|------|-------|------|
| Input Frequency | | 47Hz | -- | 63Hz |
| Stand-by Power Consumption | | -- | 0.1W | -- |
| Input Current | 115VAC | -- | 115mA | -- |
| | 230VAC | -- | 55mA | -- |

Output Specifications



| Item | Operating Conditions | Min | Typ | Max |
|--------------------------|---|-----------------------------------|-------|-----|
| Output Voltage Accuracy | | | ±3% | |
| Line Regulation | Full load | -- | ±2% | -- |
| Load Regulation | 10%~100% Load | -- | ±3% | -- |
| Ripple & Noise* | 20MHz bandwidth (peak-to-peak value) | 3.3V 5V Output | 150mV | |
| | | 12V 15V Output | 350mV | |
| | | 24V Output | 400mV | |
| Short Circuit Protection | | Hiccup, continuous, self-recovery | | |
| Over-current Protection | | ≥110%Io | | |
| Minimum Load | | 0 | -- | -- |
| Start delay time | | -- | 500ms | -- |
| Hold-up Time | | | 10ms | |
| Minimum Load | | 0% | -- | -- |

Note: * The "parallel cable" method is used for Ripple and noise test, please refer to AC-DC Converter Application Notes for specific information

General Specifications

| Item | Operating Conditions | Min | Typ | Max |
|-----------------------|-----------------------------|-------|----------|--------|
| Isolation | Input-Output, Test for 1min | -- | 3000VAC | -- |
| Operating Temperature | | -25°C | -- | +55°C |
| Storage Temperature | | -40°C | -- | +105°C |
| Storage Humidity | | -- | -- | 85%RH |
| Working frequency | | -- | 65KHz | -- |
| MTBF | MIL-HDBK-217F, 25°C | | 215,000h | |

Product Characteristic Curve

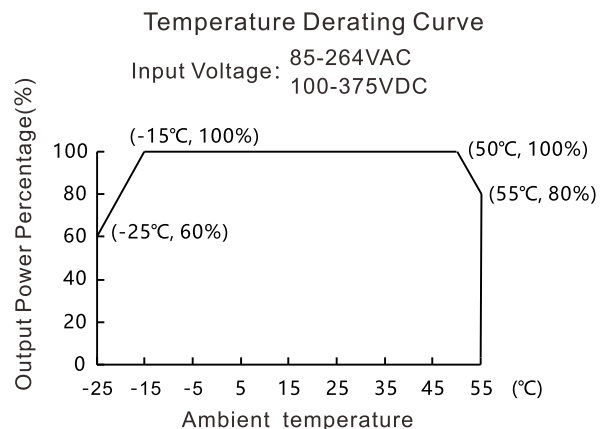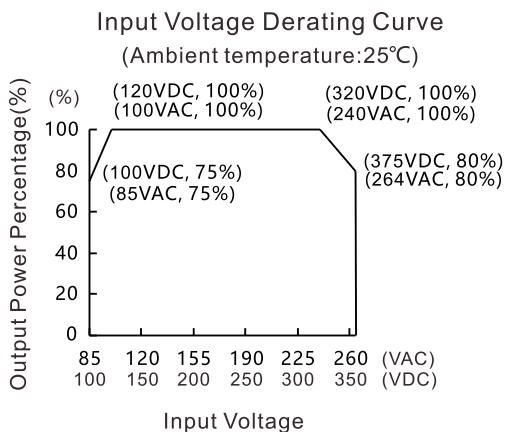

Design Reference

1 Typical application

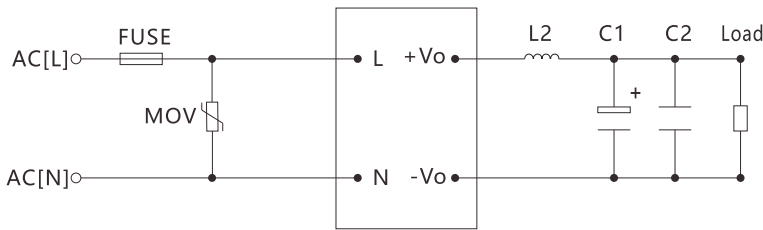


Fig. 1: Typical circuit diagram

Note

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C1 (refer to manufacturer's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C2 is a ceramic capacitor used for filtering high-frequency noise.

2 EMC compliance recommended circuit

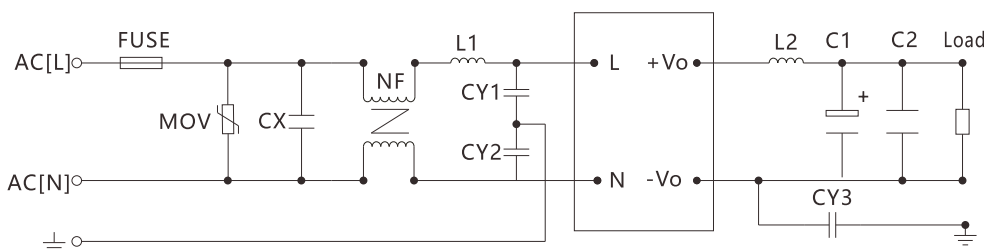


Fig 2: EMC application circuit with higher requirements

3 Input part: parameter recommendation

| Component | Recommended value |
|-------------|--------------------------|
| FUSE | 10Ω/1W Safety Resistance |
| MOV | 471KD10 |
| CX | 0.1μF/275VAC |
| L1 | 470μH |
| NF | 10mH-30mH |
| CY1,CY2,CY3 | 1000pF/250V |

4 Output part: parameter recommendation

| Output Voltage | 3.3V | 5V | 12V | 15V | 24V |
|----------------|-----------|----|-----------|-----|----------|
| C1 | 220μF/10V | | 100μF/25V | | 33μF/35V |
| C2 | 1μF/50V | | | | |
| L2 | 6.8μH | | | | |

Safety precautions

1. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. For more product information, please visit our official website (www.gzny-boxing.com) or email us (sales@gzny-boxing.com).