

5W AC/DC SMPS





DESCRIPTION

- ★ Wide input AC85~264V & DC100~375V
- ★ Output short circuit, over-current protection
- ★ Compact size, high power density
- ★ I/O isolation test voltage 3k VAC
- ★ Low ripple & noise
- ★ RoHS Compliant
- ★ Industrial grade, high reliability
- ★ Three-year quality assurance

NL05-AxxSN series is one of Nyboxing's highly efficient green power AC-DC Converter series. They feature ultra-wide wide input range accepting either AC or DC voltage, high efficiency, low power consumption and Class II reinforced insulation.

Dimensions

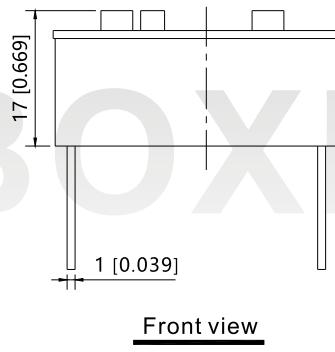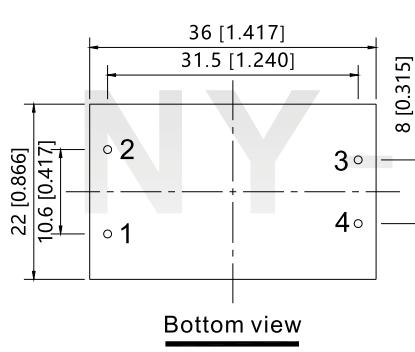

PIN	Function	
	AC IN	DC IN
1	N	-Vi
2	L	+Vi
3	+Vo	+Vo
4	-Vo	-Vo

Note:
Unit:mm[inch]
Pin diameter tolerances: $\pm 0.20[\pm 0.008]$
General tolerances: $\pm 0.50[\pm 0.020]$

Selection Guide

Part No.	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (μ F) Max.	Dimensions (LxWxH)
NL05-A05SN		5V/1000mA	68%	1000 μ F	
NL05-A12SN	5W	12V/420mA	73%	470 μ F	36.0x22.0x22.0mm
NL05-A24SN		24V/210mA	76%	220 μ F	

Input Specifications

Item	Operating Conditions	Min	Typ	Max
Input Voltage Range	AC input	85VAC	--	264VAC
	DC input	100VDC	--	375VDC
Input Frequency		47Hz	--	63Hz
Stand-by Power Consumption		--	0.2W	--
Input Current	115VAC	--	120mA	--
	230VAC	--	60mA	--

Output Specifications



Item	Operating Conditions	Min	Typ	Max
Output Voltage Accuracy		--	±3%	±5%
Line Regulation	Full load	--	±1.5%	±3%
Load Regulation	10%~100% Load	--	±2.5%	±3%
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V Output	150mV	--
		12V Output	100mV	--
		24V Output	100mV	--
Short Circuit Protection		Hiccup, continuous, self-recovery		
Over-current Protection		$\geq 110\%Io$		
Minimum Load		0	--	--
Start delay time		--	500ms	--
Hold-up Time		--	10ms	--

Note: * The "parallel cable" method is used for Ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min	Typ	Max
Isolation	Input-Output, Test for 1min	--	3000VAC	--
Operating Temperature		-25°C	--	+55°C
Storage Temperature		-40°C		+105°C
Storage Humidity		--	--	85%RH
Working frequency		--	65KHz	--
MTBF	MIL-HDBK-217F, 25°C	215,000h		

Product Characteristic Curve

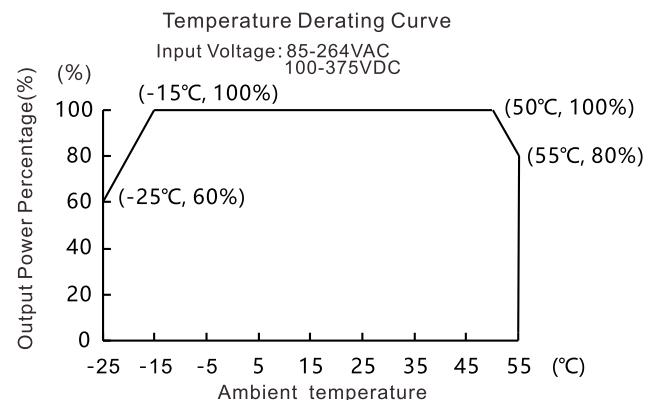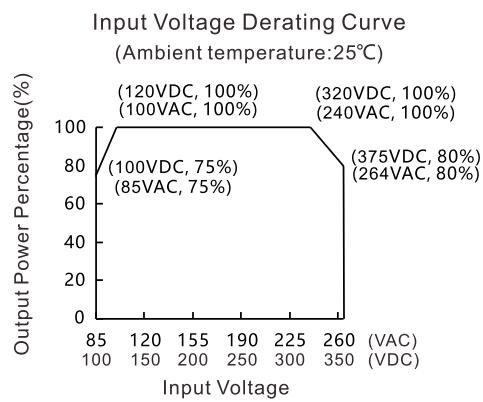

Design Reference

1 Typical application

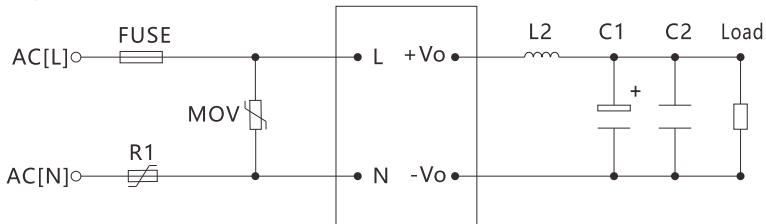


Fig. 1: Typical circuit diagram

Note

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C1 (refer to manufacturer's datasheet). Choose a Capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C2 is a ceramic capacitor used for filtering high-frequency noise.

2 EMC compliance recommended circuit

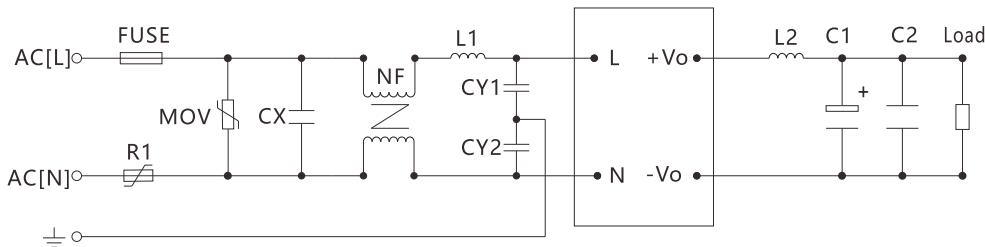


Fig 2: EMC application circuit with higher requirements

3 Input part: parameter recommendation

Component	Recommended value
FUSE	1A/250V slow-blow required
R1	10Ω/1W Safety Resistance
MOV	471KD10
CX	0.1μF/275VAC
L1	470μH
NF	10mH-30mH
CY1,CY2,CY3	1000pF/250V

4 Output part: parameter recommendation

Output Voltage	5V	12V	24V
C1	220μF/10V	100μF/25V	33μF/35V
C2		1μF/50V	
L2		6.8μH	

Safety precautions

- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our Company's corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- For more product information, please visit our official website (www.gzny-boxing.com) or email us (sales@gzny-boxing.com).